



Transverse vibrations analysis of a beam with degrading hysteretic behavior by using Euler-Bernoulli beam model

Ghiocel Groza, Ana-Maria Mitu, Nicolae Pop and Tudor Sireteanu

Abstract

The paper is based on the analytical and experimental results from [14], [15] and reveals, by mathematical methods, the degradation of material stiffness due to the decrease of the first natural frequency, when the driving frequency is slightly lower than the first natural frequency of the undegradated structure. By considering the vibration of the uniform slender cantilever beam as an oscillating system with degrading hysteretic behavior the following equation is considered

$$\frac{\partial^2 y(x, t)}{\partial t^2} + 2\zeta(t)\omega(t)\frac{\partial y(x, t)}{\partial t} + l^4\omega^2(t)\frac{\partial^4 y(x, t)}{\partial x^4} = 0$$

subjected to the boundary conditions

$$y(0, t) = y_0 \sin \omega_{input} t, \quad \frac{\partial y(0, t)}{\partial x} = 0, \quad \frac{\partial^2 y(l, t)}{\partial x^2} = 0, \quad \frac{\partial^3 y(l, t)}{\partial x^3} = 0.$$

To approximate the solution of the this problem, we use the method of Newton interpolating series (see [6]) and the Taylor series method (see [8]).

Key Words: Beam, Vibration, Analytical solution
2010 Mathematics Subject Classification: Primary 74H45; Secondary 74H15, 74H99.
Received: 1.08.2017
Accepted: 11.09.2017

1 Introduction

The transverse vibration of a uniform slender cantilever beam excited by an imposed harmonic motion is described by Euler-Bernoulli beam model [9]

$$\frac{\partial^2 y(x, t)}{\partial t^2} + c^2 \frac{\partial^4 y(x, t)}{\partial x^4} = 0, \quad c = \sqrt{\frac{EI}{\rho A}}, \quad (1)$$

where ρ is the density, A is the cross section area, l is the length and EI is the bending stiffness of the beam, subjected to the boundary conditions

$$y(0, t) = y_0 \sin \omega_{input} t, \quad \frac{\partial y(0, t)}{\partial x} = 0, \quad \frac{\partial^2 y(l, t)}{\partial x^2} = 0, \quad \frac{\partial^3 y(l, t)}{\partial x^3} = 0. \quad (2)$$

The structural stiffness degradation of an oscillating system could be beneficial if the system natural vibration frequencies are lower than those of the main components of the input (see [15]). The generalized Bouc-Wen differential model (see, for example, [2]-[4], [12]) is one of the most useful empirical model for the degrading hysteresis behavior. For the vibration of a hysteretic cantilever beam with a concentrated mass on top, in [14] and [15], it was considered an empiric model similar to an SDOF system with time dependent visco-elastic characteristic, to approximate the effect of beam structural degradation in the range of its lowest mode. For some theoretical and experimental results, we refer the reader to [1], [5], [10] and [11].

The equation of motion was taken

$$\ddot{x}(t) + 2\zeta(t)\omega(t)\dot{x}(t) + \omega(t)^2 x(t) = -\ddot{x}_0 \quad (3)$$

where

$$\omega(t) = \omega_{input} \nu(t), \quad (4)$$


$$\nu(t) = \begin{cases} 1.09 - 2.1 \cdot 10^{-4}t + 6.22 \cdot 10^{-7}t^2 - 1.43 \cdot 10^{-8}t^3, & 0 \leq t < 112 \\ 0.988 + 9.64e^{-\frac{t}{22.5}}, & 112 \leq t < 250, \end{cases} \quad (5)$$

and

$$\zeta(t) = 0.17 - 0.135e^{-\frac{t}{745}} \quad (6)$$

are obtained by interpolating experimental data.

Figure 1 (see [15]) presents three moments of the evolution in time of beam forced vibrations from below to above resonance. This shifting of vibration regime is a direct consequence of structural degradation, which results in a gradual decrease of beam bending stiffness and, therefore, of its modal frequencies.

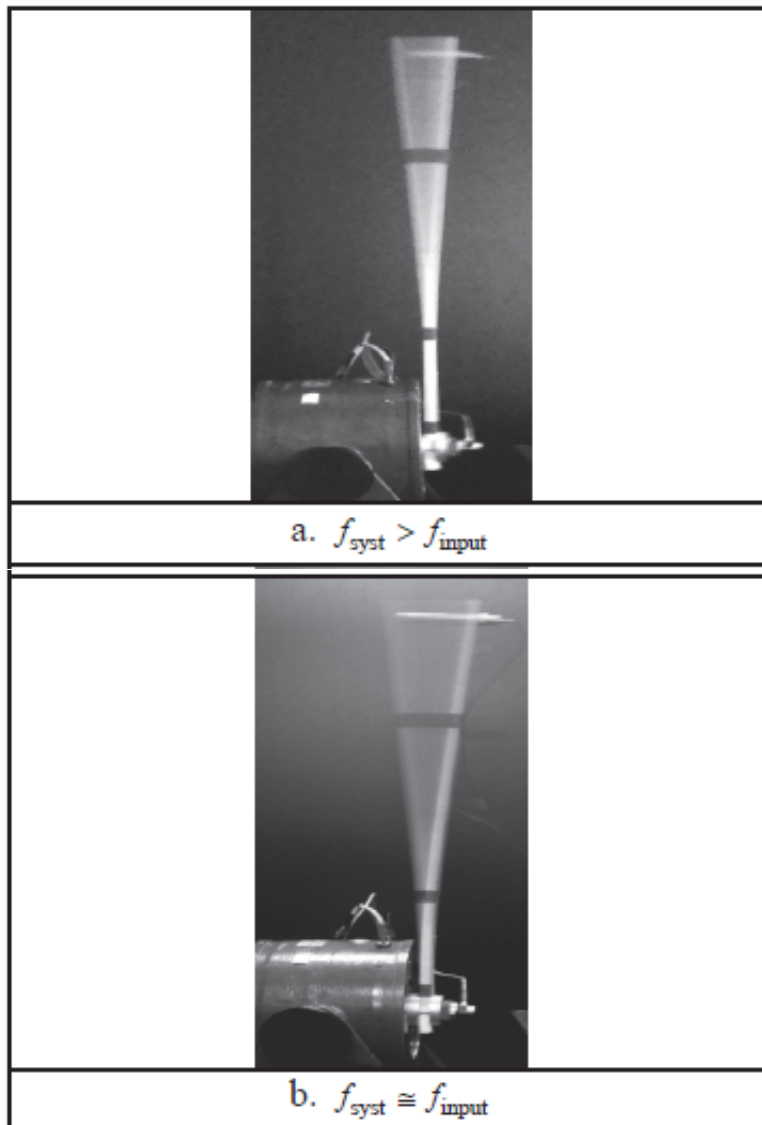

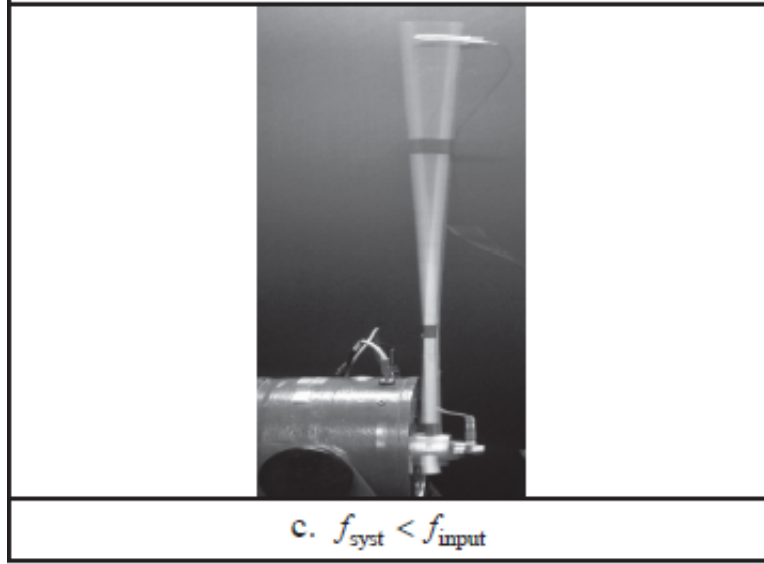


Fig. 1 Three moments of the evolution in time of beam forced vibrations

To study the structural stiffness degradation of an oscillating system, in Section 2, we use a two-dimensional model which generalizes the equations (1) and (3). Numerical results are presented in Section 3.

2 Description of the method

By introducing the dimensionless parameters (see [13])

$$\tau = \omega_b t, \quad \xi = \frac{x}{l}, \quad \bar{\nu} = \frac{\omega_{input}}{\omega_b}, \quad \eta(\xi, \tau) = \frac{y(l\xi, \tau/\omega_b)}{l}, \quad \eta_0 = \frac{y_0}{l}, \quad (7)$$

where $\omega_b = \frac{1}{l^2} \sqrt{\frac{EI}{\rho A}}$, from (1) and (2), we get the equation

$$\frac{\partial^4 \eta(\xi, \tau)}{\partial \xi^4} + \frac{\partial^2 \eta(\xi, \tau)}{\partial \tau^2} = 0 \quad (8)$$

and the boundary conditions

$$\eta(0, \tau) = \eta_0 \sin \bar{\nu} \tau, \quad \frac{\partial \eta(0, \tau)}{\partial \xi} = 0, \quad \frac{\partial^2 \eta(1, \tau)}{\partial \xi^2} = 0, \quad \frac{\partial^3 \eta(1, \tau)}{\partial \xi^3} = 0. \quad (9)$$

By following [13] we seek a solution of the form

$$\eta(\xi, \tau) = \eta_0 \phi(\xi) \sin \bar{\nu} \tau. \quad (10)$$

Then from (8) and (9) it follows that

$$\phi^{(iv)}(\xi) - \bar{\nu}^2 \phi(\xi) = 0, \quad (11)$$

$$\phi(0) = 1, \phi'(0) = 0, \phi''(1) = 0, \phi'''(1) = 0. \quad (12)$$

To approximate the solution of the problem (11), (12) we use the method of Newton interpolating series (see [6] or [7]).

Let $\{\beta_i\}_{i \geq 1}$ be the sequence of elements from $[0, 1]$ defined by $\beta_1 = 0$, $\beta_2 = 1$, $\beta_3 = \frac{1}{2}$, and for $k \geq 4$,

$$\beta_k = \frac{2s + 1}{2^{m+1}}, \text{ when } k \in (2^m + 1, 2^{m+1} + 1], \quad s = k - 2^m - 2. \quad (13)$$

An infinite series of the form

$$\sum_{k=0}^{\infty} a_k u_k(\xi), \quad (14)$$

where a_k are real number and

$$u_k(\xi) = \prod_{j=1}^k (\xi - \beta_j) \quad (15)$$

is called *Newton interpolating series* with real coefficients at $\{\beta_j\}_{j \geq 1}$. If $f : [0, 1] \rightarrow \mathbb{R}$ is a continuous function, we say that the function f is *representable into a Newton interpolating series* at $\{\beta_j\}_{j \geq 1}$ if there exists a series of the form (14), which converges absolutely and uniformly to f on $[0, 1]$.

The solution $\phi(\xi)$ of the equation (11) is representable into a Newton interpolating series at $\{\beta_j\}_{j \geq 1}$ (see [6] or [7]) and the coefficients a_k are the divided differences of $\phi(\xi)$ with respect to β_j , $j = 1, 2, \dots$. The coefficients are determined by replacing the series (14) into the equation (11) and by using the boundary conditions (12).

As a generalization of the equations (1) and (3) for the study of the vibration of the uniform slender cantilever beam, as an oscillating system with degrading hysteretic behavior, the following partial differential equation is considered

$$\frac{\partial^2 y(x, t)}{\partial t^2} + 2\zeta(t)\omega(t) \frac{\partial y(x, t)}{\partial t} + l^4 \omega^2(t) \frac{\partial^4 y(x, t)}{\partial x^4} = 0. \quad (16)$$

By (4) and (5) we get $\omega_{\text{input}} = \omega(0)/\nu(0) = \frac{\omega(0)}{1.09}$. Thus

$$\omega(t) = \frac{\omega(0)\nu(t)}{1.09}. \quad (17)$$

The boundary conditions are given by (2).

Since we'll seek an analytic solution of the equation (16) we'll approximate $\nu(t)$ by a polynomial. By least-square method we found the following polynomial, denoted also by $\nu(t)$.

$$\nu(t) = -.36955446 \cdot 10^{-11} t^5 + .22954260 \cdot 10^{-8} t^4 - .47389354 \cdot 10^{-6} t^3 + .35342025 \cdot 10^{-4} t^2 - .10994788 \cdot 10^{-2} t + 1.09413538. \quad (18)$$

To approximate the solution we use the Taylor series method (see, for example, [8]). Thus the set \mathbb{N}^2 of pairs of non-negative integers is ordered by

$$\mathbf{i} = (i_1, i_2) < \mathbf{i}' = (i'_1, i'_2) \text{ if either } i_1 + i_2 < i'_1 + i'_2 \text{ or } i_1 + i_2 = i'_1 + i'_2 \text{ and } i_2 < i'_2. \quad (19)$$

Let P be a polynomial in two variables x_1, x_2 with real coefficients. The terms of the polynomials can be ordered by (19) with respect to exponents of the unknowns. Hence we can write

$$P(\mathbf{x}) = \sum_{\mathbf{i}=\mathbf{0}}^{\mathbf{m}} c_{\mathbf{i}} x_1^{i_1} x_2^{i_2}, \quad (20)$$

where $\mathbf{0} = (0, 0)$, $c_{\mathbf{m}} = c_{(m_1, m_2)} \neq 0$, and \mathbf{m} is the greatest index \mathbf{i} with respect to the order defined by (19) such that $c_{\mathbf{i}} \neq 0$. Then $\mathbf{m} = \mathbf{d}_P$ is called the degree of P . The ordinary degree of the polynomial P is $\deg(P) = m_1 + m_2$.

Let P be a polynomial in two variables written in the form of (20) with respect to the order defined by (19). Thus

$$P(x_1, x_2) = c_{(0,0)} + c_{(1,0)}x_1 + c_{(0,1)}x_2 + c_{(2,0)}x_1^2 + c_{(1,1)}x_1x_2 + c_{(0,2)}x_2^2 + c_{(3,0)}x_1^3 + c_{(2,1)}x_1^2x_2 + c_{(1,2)}x_1x_2^2 + c_{(0,3)}x_2^3 + \dots \quad (21)$$

To find the position of a term in (21), first we write $P(x_1, x_2)$ as

$$P(x_1, x_2) = a_1 + a_2x_1 + a_3x_2 + a_4x_1^2 + a_5x_1x_2 + a_6x_2^2 + a_7x_1^3 + a_8x_1^2x_2 + a_9x_1x_2^2 + \dots \quad (22)$$

Then γ from \mathbb{N}^2 to \mathbb{N}^* defined by

$$\gamma(i_1, i_2) = \frac{(i_1 + i_2)(i_1 + i_2 + 1)}{2} + i_2 + 1 \quad (23)$$

is a one-to-one mapping which keeps the order (see [8]). By using (21) and (23), we obtain the position $\gamma(i_1, i_2)$ of the term $c_{\mathbf{i}}\mathbf{x}^{\mathbf{i}}$. For example, $\gamma(1, 2) = 9$, which implies that the term $c_{(2,1)}x_1x_2^2$ is located in the ninth term in (22).

By using Taylor series, the solution of the partial differential equation from (16) with the boundary conditions (2) is considered of the form

$$y(x, \tau) = \sum_{(i,j) \geq (0,0)} c_{(i,j)} x^i t^j, \quad (24)$$

where the terms of the Taylor series are ordered by following (19) with respect to indexes $(i, j) \in \mathbb{N}^2$. Then by using (16) and (2) the solution is approximated by a partial sum

$$P_{\mathbf{m}}(x, t) = \sum_{(i,j) \geq (0,0)}^{\mathbf{m}} c_{(i,j)} x^i t^j. \quad (25)$$

By denoting

$$2\zeta(t)\omega(t) = \sum_{j=0}^{n_1} d_j t^j,$$

$$l^4 \omega^2(t) = \sum_{j=0}^{n_2} e_j t^j,$$

by (16) we get

$$\sum_{(i,j) \geq (0,0)} (j+1)(j+2)c_{(i,j+2)} x^i t^j + \sum_{j=0}^{n_1} d_j t^j \sum_{(i,j) \geq (0,0)} (j+1)c_{(i,j+1)} x^i t^j$$

$$+ \sum_{j=0}^{n_2} e_j t^j \sum_{(i,j) \geq (0,0)} (i+1)(i+2)(i+3)(i+4)c_{(i+4,j)} x^i t^j = 0.$$

Hence, for $(i+4, j) \leq \mathbf{m}$, it follows that

$$c_{(i+4,j)} = \frac{1}{e_0(i+1)(i+2)(i+3)(i+4)} \left(-(j+1)(j+2)c_{(i,j+2)} \right.$$

$$\left. - \sum_{k=0}^j d_k (j+1-k)c_{(i,j+1-k)} - \sum_{k=0}^j e_k (i+1)(i+2)(i+3)(i+4)c_{(i+4,j-k)} \right). \quad (26)$$

Then by (2) and (25) we get

$$c_{(0,j)} = \begin{cases} 0 & \text{if } j = 2k \\ \frac{y_0 (-1)^k \omega_{input}^{2k+1}}{(2k+1)!} & \text{if } j = 2k+1, \end{cases} \quad c_{(1,j)} = 0, \quad (27)$$

$$\sum_{i \geq 0}^{(i+2,j) \leq \mathbf{m}} (i+1)(i+2)l^i c_{(i+2,j)} = 0, \quad j = 0, 1, \dots, \quad (28)$$

$$\sum_{i \geq 0}^{(i+3,j) \leq \mathbf{m}} (i+1)(i+2)(i+3)l^i c_{(i+3,j)} = 0, \quad j = 0, 1, \dots. \quad (29)$$

By (27)-(29) we obtain $c_{(i,j)}$, for every $(i, j) \leq \mathbf{m}$ and by (25) it follows the approximate solution $P_{\mathbf{m}}(x, t)$.

We note that equation (1) is obtained from (16), for $\zeta \equiv 0$ and $\nu \equiv 1$.

3 Numerical results

Consider $l = 0.30$ m, $y_0 = 0.0025$ m and $\omega_{input} = 5$ Hz. By choosing $\mathbf{m} = (0, 60)$ results for forced vibrations are represented in Figures 2-8. The continuous lines represent the values for the free end and the points those which correspond to the beam base. Numerical results for the acceleration are given in Table 1.

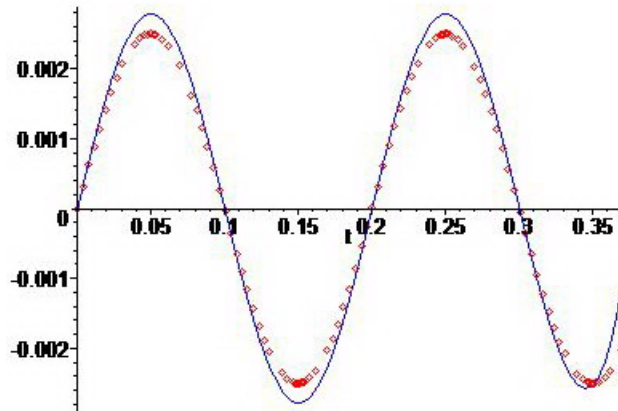


Fig. 2 Displacements at $t_0 = 0$.

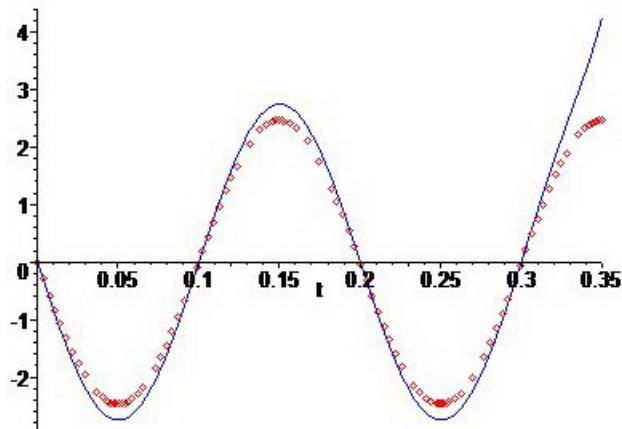


Fig. 3 Acceleration at $t_0 = 0$

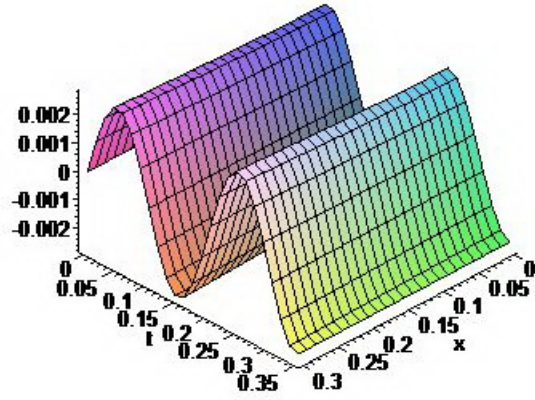


Fig. 4 Displacements $y(x, t)$ at $x \in [0, 0.30]$ and $t_0 = 0$

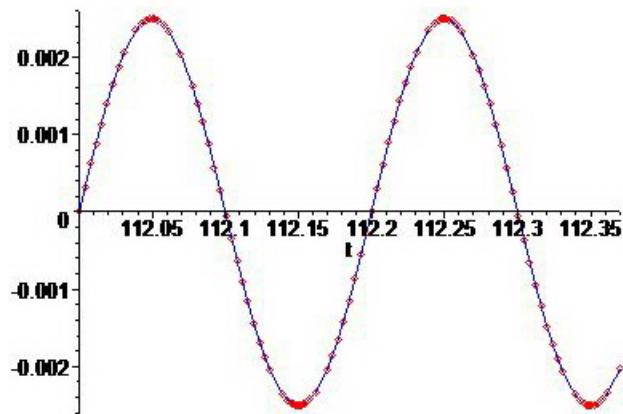


Fig. 5 Displacements at $t_0 = 112$

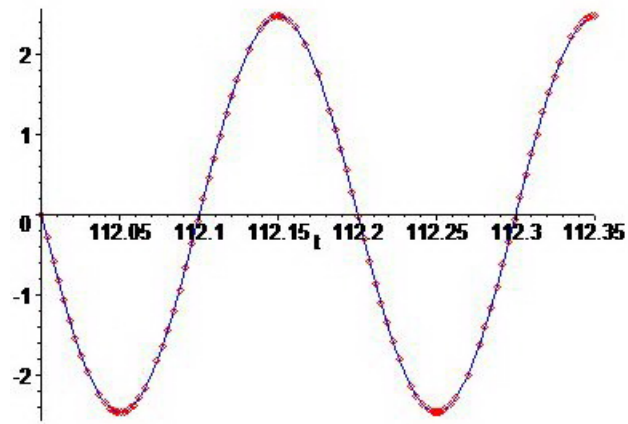


Fig. 6 Acceleration at $t_0 = 112$

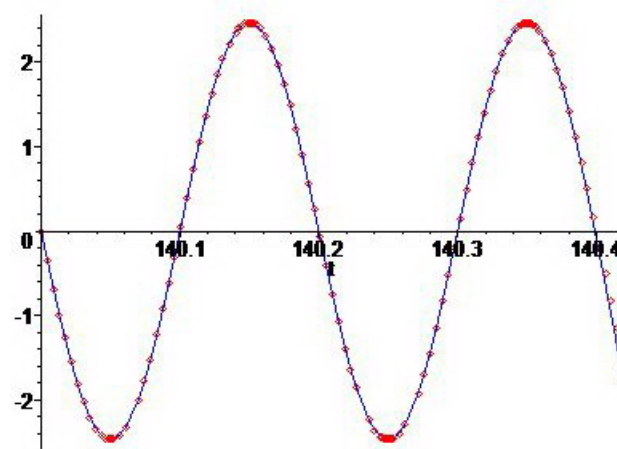


Fig. 7 Displacements at $t_0 = 140$

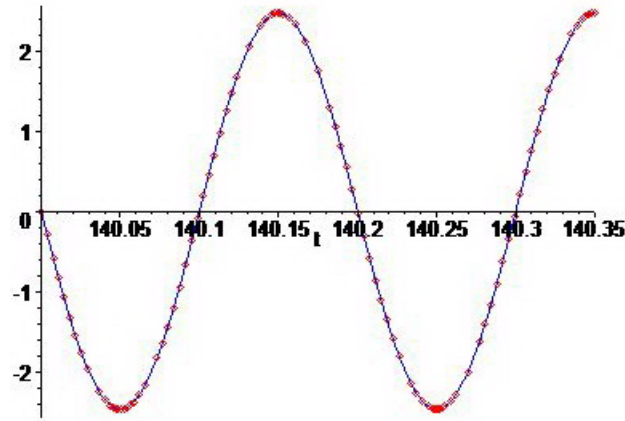


Fig. 8 Acceleration at $t_0 = 140$

If we define an amplification factor $A(t_0)$ as $A(t_0) := \frac{\max_{t \in [t_0, t_0 + \delta]} |\ddot{y}(l, t)|}{\max_{t \in [t_0, t_0 + \delta]} |\ddot{y}(0, t)|}$, where $[t_0, t_0 + \delta]$ is a suitable interval where $\ddot{y}(l, t)$ and $\ddot{y}(0, t)$ are bounded, we get $A(0) = 2.714433$, $A(50) = 2.144169$, $A(112) = 1.040357$, $A(140) = 1.007035$ and $A(204) = 1.000000$. Thus, for forced vibrations the amplification factor decreases when ζ increases, that it is smaller when the degradation increases.

To study the free transverse vibrations we consider the same partial differential equation but the first boundary condition is replaced by

$$y(0, t) = \begin{cases} y_0 \sin \omega_{input} t, & \text{if } t \in [t_0, t_0 + 0.2] \\ 0, & \text{if } t > t_0 + 0.2. \end{cases}$$

By studying the free vibrations (see Figures 9 and 10) it follows that, when the degradation is greater (the case $t_0 = 220$), after $t > t_0 + 0.2$ the values of the acceleration are smaller than in the initial case, $t_0 = 0$.

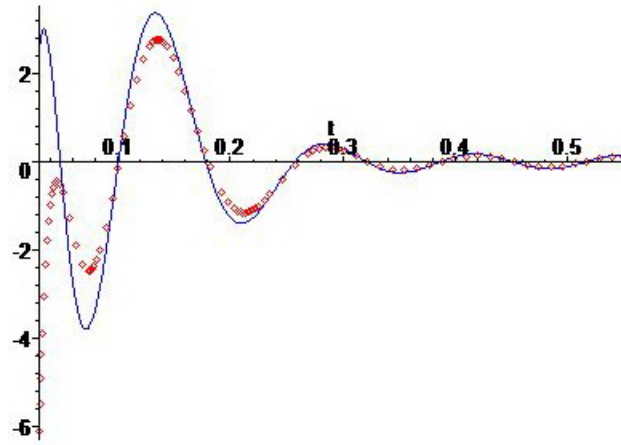


Fig. 9 Acceleration at $t_0 = 0$

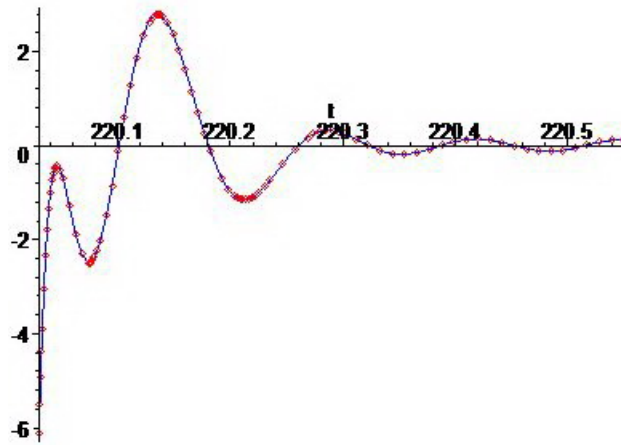


Fig. 10 Acceleration at $t_0 = 220$

Table 1

	$t_0 = 0 \text{ s}$	$t_0 = 50 \text{ s}$	$t_0 = 112 \text{ s}$	$t_0 = 140 \text{ s}$	$t_0 = 204 \text{ s}$
t_0	0.371724	0.381938	0.015509	0.001708	0.000089
$t_0+0.02$	-3.632027	-2.728699	-1.440674	-1.448955	-1.450230
$t_0+0.05$	-6.690919	-5.184976	-2.472290	-2.467457	-2.467401
$t_0+0.07$	-5.631675	-4.429885	-2.009155	-1.997214	-1.996222
$t_0+0.10$	-0.371928	-0.387456	-0.015344	-0.001697	-0.000088
$t_0+0.12$	3.631970	2.754801	1.440744	1.448963	1.450231
$t_0+0.15$	6.691102	5.237521	2.472184	2.467457	2.467401
$t_0+0.17$	5.631942	4.475981	2.008974	1.997208	1.996221
$t_0+0.20$	0.372105	0.393154	0.015183	0.001687	0.000088
$t_0+0.22$	-3.632186	-2.781689	-1.440806	-1.448970	-1.450231
$t_0+0.25$	-6.697594	-5.290524	-2.471928	-2.467437	-2.467399
$t_0+0.27$	-5.674031	-4.517869	-2.007969	-1.997094	-1.996206
$t_0+0.30$	-0.928329	-0.401417	-0.007500	-0.000661	0.000108
$t_0+0.32$	0.928040	2.487189	1.466843	1.452690	1.451151

4 Conclusions

To study the structural stiffness degradation of a uniform slender cantilever beam as a consequence of transverse vibrations due to an imposed harmonic motion, we use a two-dimensional model which generalizes those based on an SDOF oscillating system. The numerical results obtained describes closed enough the real behavior of this oscillating system found by experimental results in [14].

Acknowledgment

The work behind this paper has been financially supported by The Executive Agency for Higher Education, Research, Development and Innovation Funding (UEFISCDI) through the research contract 112/2014. The support is gratefully acknowledged.

References

- [1] C. Armanini, F. Dal Corso, D. Misseroni, D. Bigoni, *From the elastica compass to the elastica catapult: an essay on the mechanics of soft robot arm*, Proceedings of the Royal Society A, **473** : 20160870 (2017).

- [2] T. T. Baber, Y. K. Wen, *Random vibration of hysteretic for degrading systems*, Journal of Engineering Mechanics ASCE, **107** (1981), (EM6), 1069-1089.
- [3] T. T. Baber, M. N. Noori, *Random vibration of degrading pinching systems*, Journal of Engineering Mechanics ASCE, **111** (1985), (8), 1010-1026.
- [4] T. T. Baber, M. N. Noori, *Modeling general hysteresis behaviour and random vibration applications*, Journal of Vibration, Acoustics, Stress and Reliability in Design, **108** (1986), (4), 411-420.
- [5] F. Dal Corso, D. Misseroni, N. M. Pugno, A. B. Movchan, N. V., Movchan, D. Bigoni, *Serpentine locomotion through elastic energy release*, Journal of the Royal Society Interface, **14** : 20170055 (2017).
- [6] G. Groza, N. Pop, *A numerical method for solving of the boundary value problems for ordinary differential equations*, Result. Math., **53** (2009), No. 3-4, 295-302.
- [7] G. Groza, M. Jianu, N. Pop, *Infinitely differentiable functions represented into Newton interpolating series*, Carpathian J. Math., **30** (2014), No. 3, 309-316.
- [8] G. Groza, M. Razzaghi, *A Taylor series method for the solution of the linear initial boundary-value problems for partial differential equations*, Comput. Math. Appl., **66** (2013), No. 7, 1329-1343.
- [9] J. D. Inman, *Engineering Vibration*, Prentice Hall International, Inc., 1994.
- [10] Gh. Lupu, E.M. Crăciun, E. Suliman - *An Extension of Equilibrium Problem for the Plane Simple Pendulum*, An. St. Univ. Ovidius Constanta, seria Matematica, Vol I, p.141-145, (1993).
- [11] Gh. Lupu, A. Răbăea, E.M. Crăciun *Theoretical Aspects Concerning Vibrations of Elastical Technological Systems*, An. St. Univ. Ovidius Constanta, seria Matematica, Vol I, p.133-139, (1993).
- [12] J. B. Roberts, P. D. Spanos, *Random vibration and statistical linearization*, Dover Publication, Inc., Mineola New York, 2003.
- [13] T. Sireteanu, *A possible explanation of the building breakage between 2nd and 3rd floor when subjected to strong earthquakes*, Proceedings of the Romanian Academy, Series A, **6** (2005), No. 3, 241-247.

- [14] T. Sireteanu, A. M. Mitu, G. Ghita, V. Serban, *Modification of the building dynamic response due to structural damaging during strong earthquakes*, Proceedings of the Romanian Academy, Series A, **7** (2006), No. 2, 143-151.
- [15] T. Sireteanu, A. M. Mitu, C. Meglea, *Analytic and experimental assessment of degrading structures dynamic behaviour*, Romanian Journal of Acoustics and Vibrations , **IX** (2012), No.1, 3-8.

Ghiocel GROZA,
Department of Mathematics and Computer Science,
Technical University of Civil Engineering Bucharest,
124 Lacul Tei, 020396 Bucharest, Romania.
E-mail: grozag@utcb.ro

Ana-Maria MITU
Institute of Solid Mechanics Romanian Academy
15 Constantin Mille Street, 010141 Bucharest, Romania
E-mail: anamariamitu@yahoo.com

Nicolae POP
Institute of Solid Mechanics Romanian Academy
15 Constantin Mille Street, 010141 Bucharest, Romania, and
Department of Mathematics and Computer Science,
Faculty of Sciences, North University Center at Baia Mare,
Technical University of Cluj-Napoca
E-mail: nicpop@gmail.com

Tudor SIRETEANU
Institute of Solid Mechanics Romanian Academy
15 Constantin Mille Street, 010141 Bucharest, Romania
E-mail: siret@imsar.bu.edu.ro

